

# Dimensions

ISO 4401-03/CETOP03 Housing kits


## Dimensions

mm (inch)


### A324W Housing kit

Part Number **02-185351**

#### Cavity porting



Torque cartridge in housing  
48-54 Nm (35-40 ft. lbs)

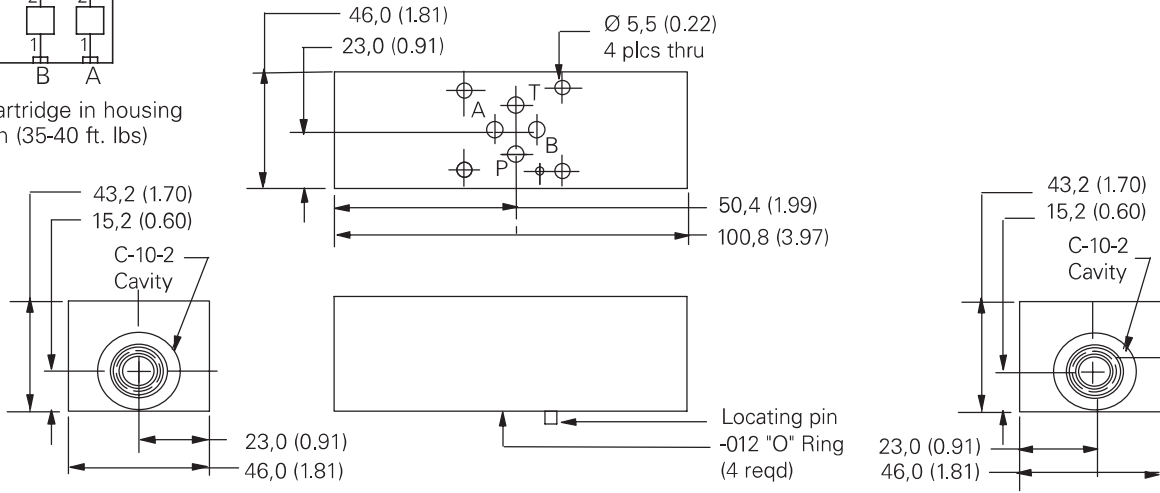


#### Typical cartridges

#### Function

FAR1-10	Flow regulator pressure compensated and check, meter out A & B
FCV7-10	Flow control & check, meter in A & B
SV3-10-C	Solenoid 2-way poppet type blocking on A & B normally closed
SV3-10-O	Solenoid 2-way poppet type blocking on A & B normally open
SV4-10-C	Solenoid 2-way spool type blocking on A & B normally closed
SV4-10-O	Solenoid 2-way spool type blocking on A & B normally open


#### Cavity porting



Torque cartridge in housing  
48-54 Nm (35-40 ft. lbs)

### A326P Housing kit

Part Number **02-185353**

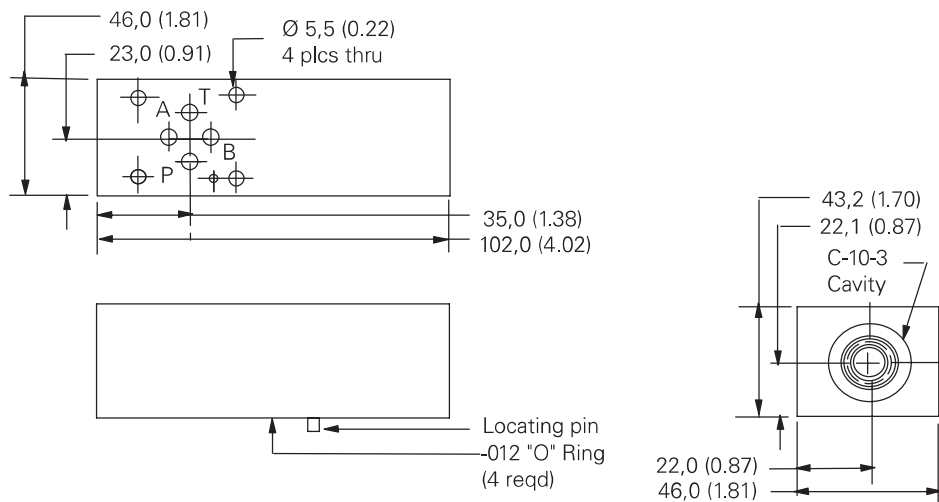

#### Typical cartridges

#### Function

MRV3-10-K-O	Manual rotary selector on P
PRV2-10	Reducing valve (P) drained to T
SV1-10-3	Solenoid 3-way selector on P
SV4-10-3	Solenoid 3-way selector on P

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.